

AP-102

*BCD Output(Optional)



■ DC Voltage Measurement

Model	Range	Maximum Resolution	Input Impedance	Input Protection
AP-102-10	±19.99mV	10μV	100MΩ	±250V
AP-102-11	±199.9mV	100μV	100MΩ	±250V
AP-102-12	±1.999V	1mV	100MΩ	±250V
AP-102-13	±19.99V	10mV	10MΩ	±250V
AP-102-14	±199.9V	100mV	10MΩ	±500V

Accuracy: ±0.1% rdg. ±1 digit (23°C±5°C)

■ DC Current Measurement

Model	Range	Maximum Resolution	Internal Resistance	Input Protection
AP-102-21	±199.9μA	100nA	1kΩ	±10mA
AP-102-22	±1.999mA	1μA	100Ω	±50mA
AP-102-23	±19.99mA	10μA	10Ω	±150mA
AP-102-24	±199.9mA	100μA	1Ω	±500mA
AP-102-25	±1.999A	1mA	0.1Ω	±3A

Accuracy: ±0.2% rdg. ±1 digit(23°C±5°C)
±0.3% rdg. ±1 digit only for AP-102-25

■ Specifications

- Input configuration: Single Ended
- Input Bias Current: 50pA(Typ.)
- Conversion Rate: 2.5/sec or 12.5/sec(50Hz), 15/sec(60Hz)
- Normal Mode Rejection: More than 40dB(50/60Hz)
- Zero Stability: Automatic Zero Adjustment
- Display: LED, 14.2mm 3 1/2 -digit
- Polarity: "A-" is displayed automatically
- Decimal Point: Settable to any digit position
- Overrange Indication: When input exceeds the maximum display, 1999 or -1999 flashes.
- Power Supply: AC90~132V, AC180~264V, DC5V±5%
- Operating Temperature: 0~50°C, 35 to 85%RH
- Power Consumption: 1.5VA
- Dimensions: 48(H) × 96(W) × 73(D)mm DIN Size
- Weight: Approx. 150g(For AC), 85g(For DC)
- Dielectric Strength: AC type;Between input(Lo)terminal and earth, DC500V
Between power supply terminal and input terminal, earth, common, case, AC1500V/1 min.
DC type;Between input(Lo)and power supply(0V), DC500V
- Insulation Resistance: DC500V 100MΩ at above terminals


■ BCD Data Output (Isolated from input (Lo))

- Measured data: Tri-state parallel BCD positive logic latch output
- Polarity signal: "1" level at plus input
- "OVER" signal: "1" level at overflow input
- Printing command signal: A positive pulse of approx 1ms at every measurement completion
- Each signal of the above: TTL level Fanout=2
- *Each signal of the above can be changed to negative logic


■ Features

- BCD(option)
- Bright LED 14.2mm(Red)
- AC180~264V, 90~132V, DC5V
- 20mV~200V, 200μA~2A Measurement
- ±600V Measurement(option)
- BCD Open Collector available


■ Ordering Code

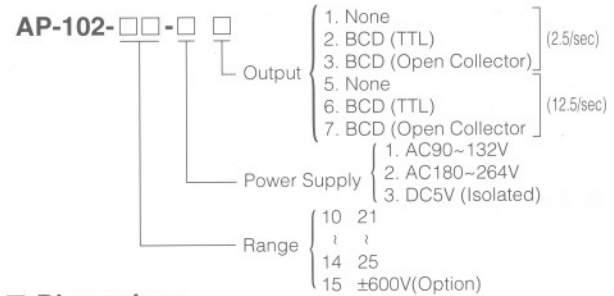

■ Dimensions

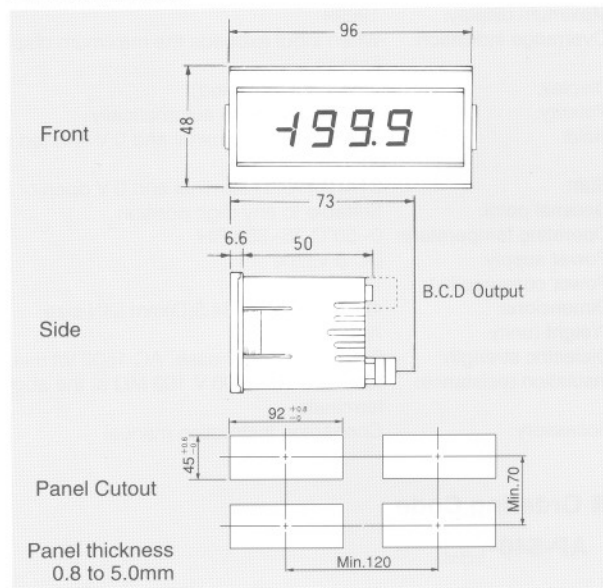

■ Connection Diagram

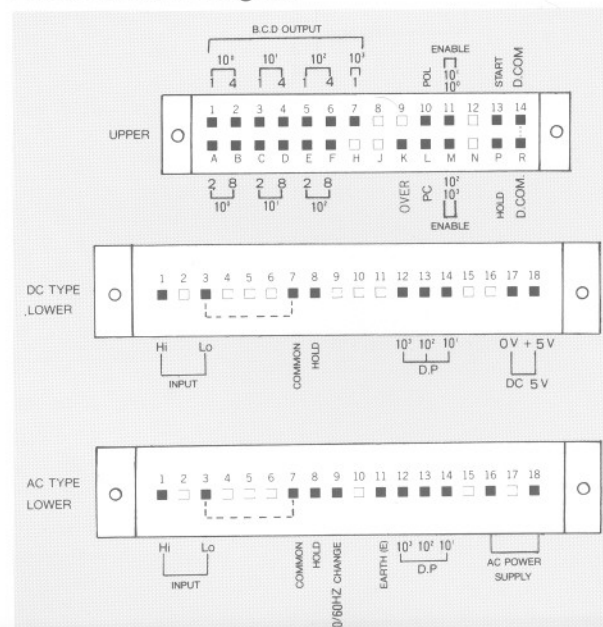

Sales, Service, Technical support

Topac Inc.

101 Derby St., Hingham MA 02043 USA
www.topac.com, sales@topac.com
Tel: 781 740 8778 Fax: 781 740 8779